

## Technical Data

- Stitch type 301 Lockstitch
- Max. sewing speed 2,200 spm
- Max. stitch length 6.0 mm
- Max. top feed stroke 7.0 mm
- Max. fabric clearance 14 mm
- Needle system 134-17/DP×17
- Needle size Nm 80-100
- Balance wheel 80 mm eff. Dia.
- Recommended motor power minimum 0.55 kW
- Cylinder arm diameter 46.5 mm

### Clearance under the arm

257×110 mm

### Carton dimensions and gross weights for sewing head:

63×28×60 cm; 44 kg

Specifications can differ depending on model.



TW3-P335		•	2,200	•	6.0 mm	134-17/ DP×17 80-100	33.4	Standard	Ø 46.5	10/14	40/3	–	–	–	M/H
	V	•		•				Standard				–	–	–	
	B	•		•				Large				–	–	–	
	VB	•		•				Large				–	–	–	
	D2-T3	•		•				Standard				•	•	•	
	B-D2-T3	•		•				Large				•	•	•	



TYPICAL AUSTRALIA

D-  
Tel.: 0419 884 920

E-mail: [camsew@outlook.com](mailto:camsew@outlook.com)  
[www.camsew.com.au](http://www.camsew.com.au)




# TW3-P335


CYLINDER ARM COMPOUND FEED LOCKSTITCH SEWING MACHINE  
FREIARM-, 3-FACH-TRANSPORT-, DOPPELSTIPPSTICH-NÄHMASCHINE



**TYPICAL**

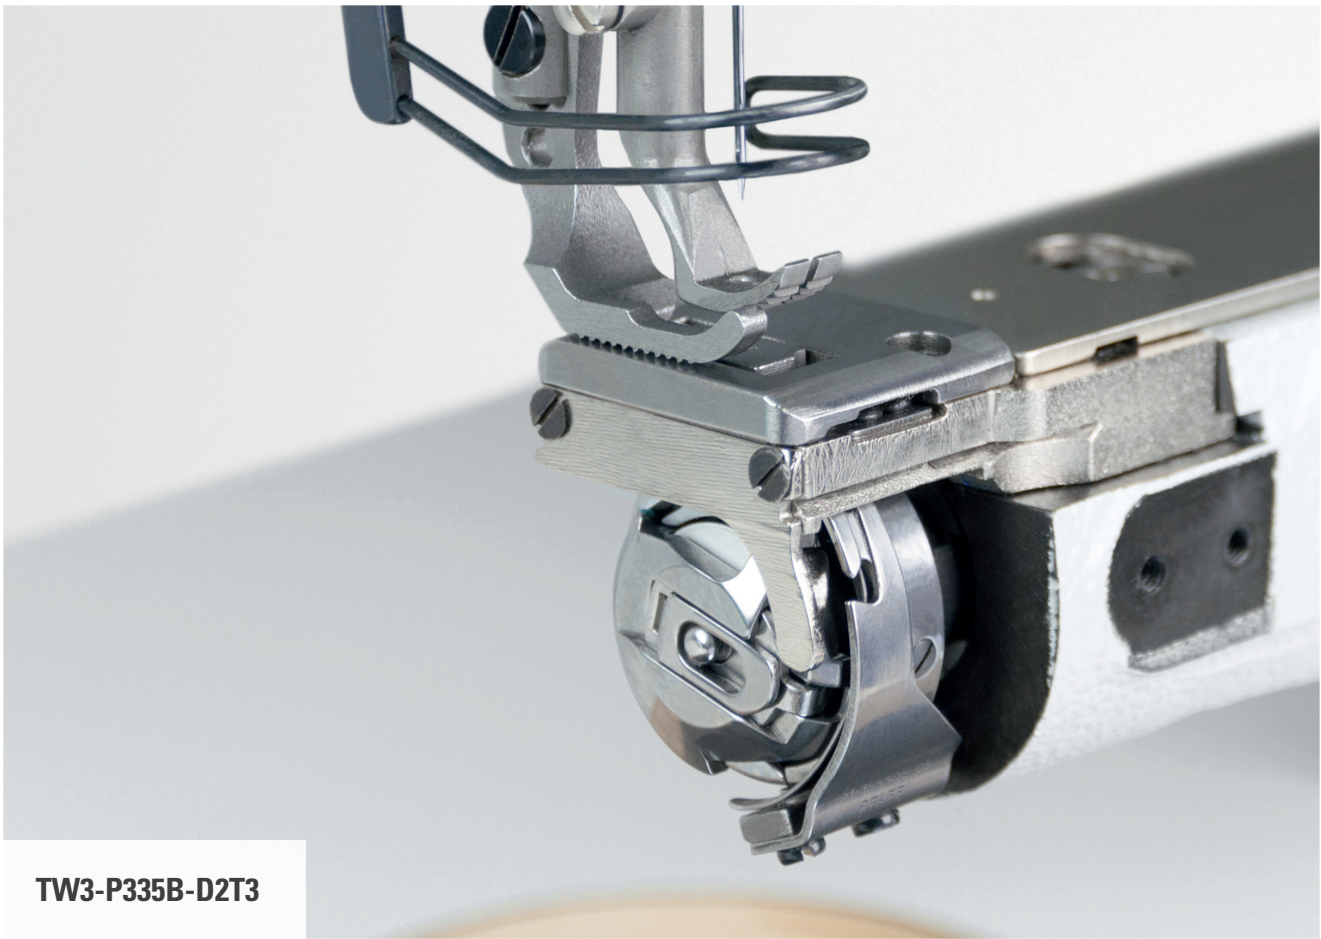


**TW3-P335B-D2T3**

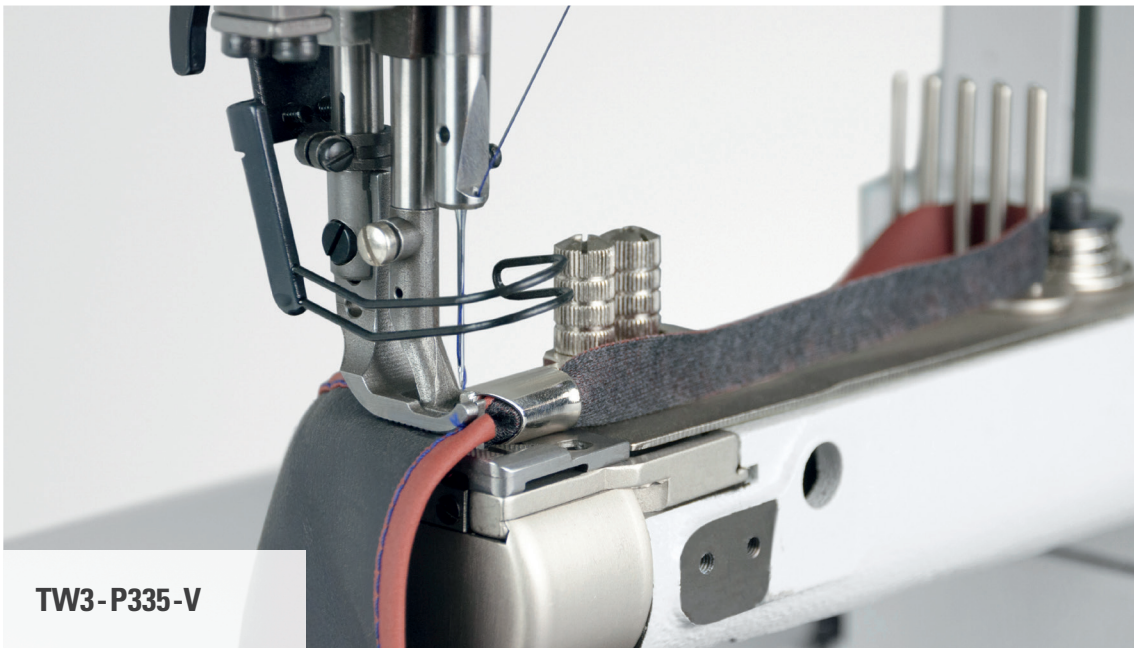

**TW3-P335-V**

**TW3-P335:** 10.0 mm  
**TW3-P335B:** 12.7 mm



## EN Features & Benefits

- Slim cylinder arm diameter 46.5 mm
- Compound feed
- 2.5–7.0 mm top feed stroke allows easy sewing – even at cross-seams
- 14 mm clearance under the lifted sewing feet for easy loading and unloading
- Max. 6 mm stitch length adjustable – forwards and backwards
- Integrated bobbin winder

### Application

Upholstery industry, automotive industry, technical textiles, leather apparel, small leather goods, shoes, etc.

### Options

- **TW3-P335V**  
binding attachment synchronized with feed movement
- **TW3-P335B**  
with big hook (+40% bobbin thread capacity)
- **TW3-P335VB**  
binding attachment synchronized with feed movement & big hook (+40% bobbin thread capacity)

## DE Merkmale & Vorteile


- Schlanker Freiarm Ø 46,5 mm
- 3-fach Transport
- 2,5–7,0 mm Obertransporthub für sicheres Transportieren – auch über Quernähte
- 14 mm Durchgangsraum unter den Nähfüßen für einfaches Einlegen und Entnehmen des Nähguts
- Max. 6 mm Stichtlänge – Vorwärts und Rückwärts
- Integrierter Unterfadenspuler

### Anwendungen

Polsterindustrie, Automobilindustrie, technische Textilien, Lederbekleidung, Kleinlederwaren, Schuhe, usw.

### Optionen

- **TW3-P335V**  
mit mitgehendem Bandeinfasser
- **TW3-P335B**  
mit großem Greifer (40% mehr Spulenkapazität)
- **TW3-P335VB**  
mit mitgehendem Bandeinfasser und großem Greifer (40% mehr Spulenkapazität)

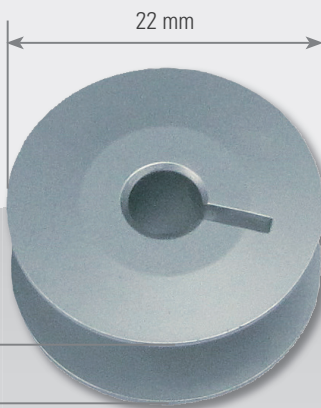

# TYPICAL

TW3-P335