


TYPICAL

GC 0330

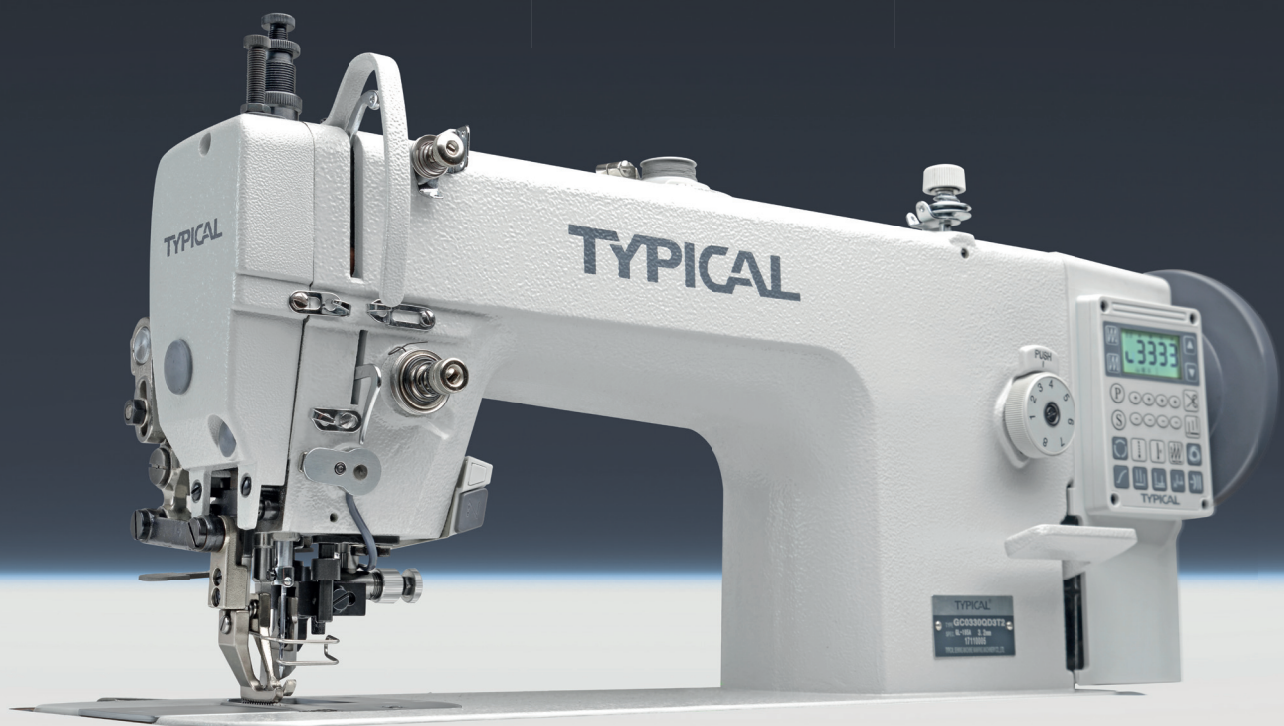

**DIRECT DRIVE LOCKSTITCH SEWING MACHINE WITH ALTERNATING TOP
AND BOTTOM FEED**

DOPPELSTAPPSTICH NÄHMASCHINE MIT ALTERNIERENDEM OBER-,
UNTERTRANSPORT UND DIREKTANTRIEB



TECHNICAL DATA



MAX SEWING SPEED

» 2.200 spm



MAX STITCH LENGTH

» 8 mm



MAX THREAD THICKNESS

» 20/3



CLEARANCE UNDER THE ARM

» 260x120 mm



FEATURES

- » Direct-Drive
- » Automatic oil pump lubrication system
- D3T2** » Automatic thread trimmer, back tack & presser foot lift; thread clamp; LED sewing light
- Q** » Edge cutter
- Q D3T2** » Automatic thread trimmer, back tack & presser foot lift; edge cutter; thread clamp; LED sewing light

TECHNISCHE DATEN



MAX. NÄHGESCHWINDIGKEIT

» 2.200 Stiche / Min.



MAX. STICHLÄNGE

» 8 mm



MAX. FADENSTÄRKE

» 20/3



DURCHGANGSRAUM IM NÄHMASCHINENARM

» 260x120 mm




MERKMALE

- » Direktantrieb
- » Automatisches Druckumlauf-Schmiersystem
- D3T2** » Automatischer Fadenschneider, Verriegelungseinrichtung & Fußblüftung; Fadenklemme; LED Nählicht
- Q** » Kantenbeschneider
- Q D3T2** » Automatischer Fadenschneider, Verriegelungseinrichtung & Fußblüftung; Kantenbeschneider; Fadenklemme; LED Nählicht



» GC 0330

	D2T3	Q	Q D2T3											
	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.200	2.200	2.200	8.0	135x17/ DPx17 120-150	37	26 mm	6/13	20/3	-	-	-	-	M

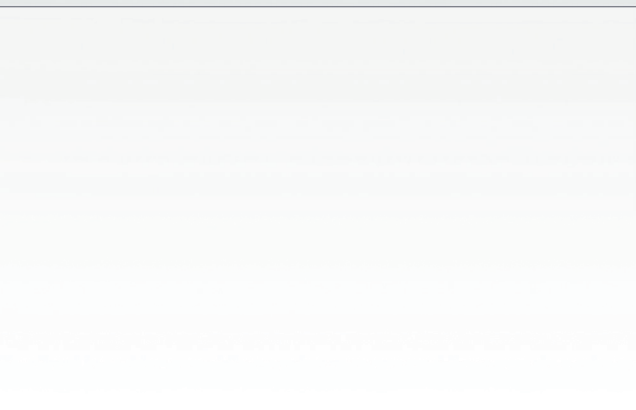

VETRON TYPICAL EUROPE GmbH

Clara Immerwahr Str. 6
D-67661 Kaiserslautern
Tel.: +49 (0)6301 32075-0
Fax: +49 (0)6301 32075-11

E-Mail: sales@vetrontypical.com
www.vetrontypical.com

