

# TYPICAL

Model: GC6760-X-MD3  
From: **CAMSEW**

Unique



**Direct Servo Drive.**

**Auto Thread Trim.**

**Extended Arm.**

**Sealed Oil Sump no oil  
Stains.**


**Built in Bobbin  
Winder.**

**Control Panel for  
Auto Stitch Settings.**

**Auto Foot Lift.**


# TYPICAL X FEED

Evolution of seam quality

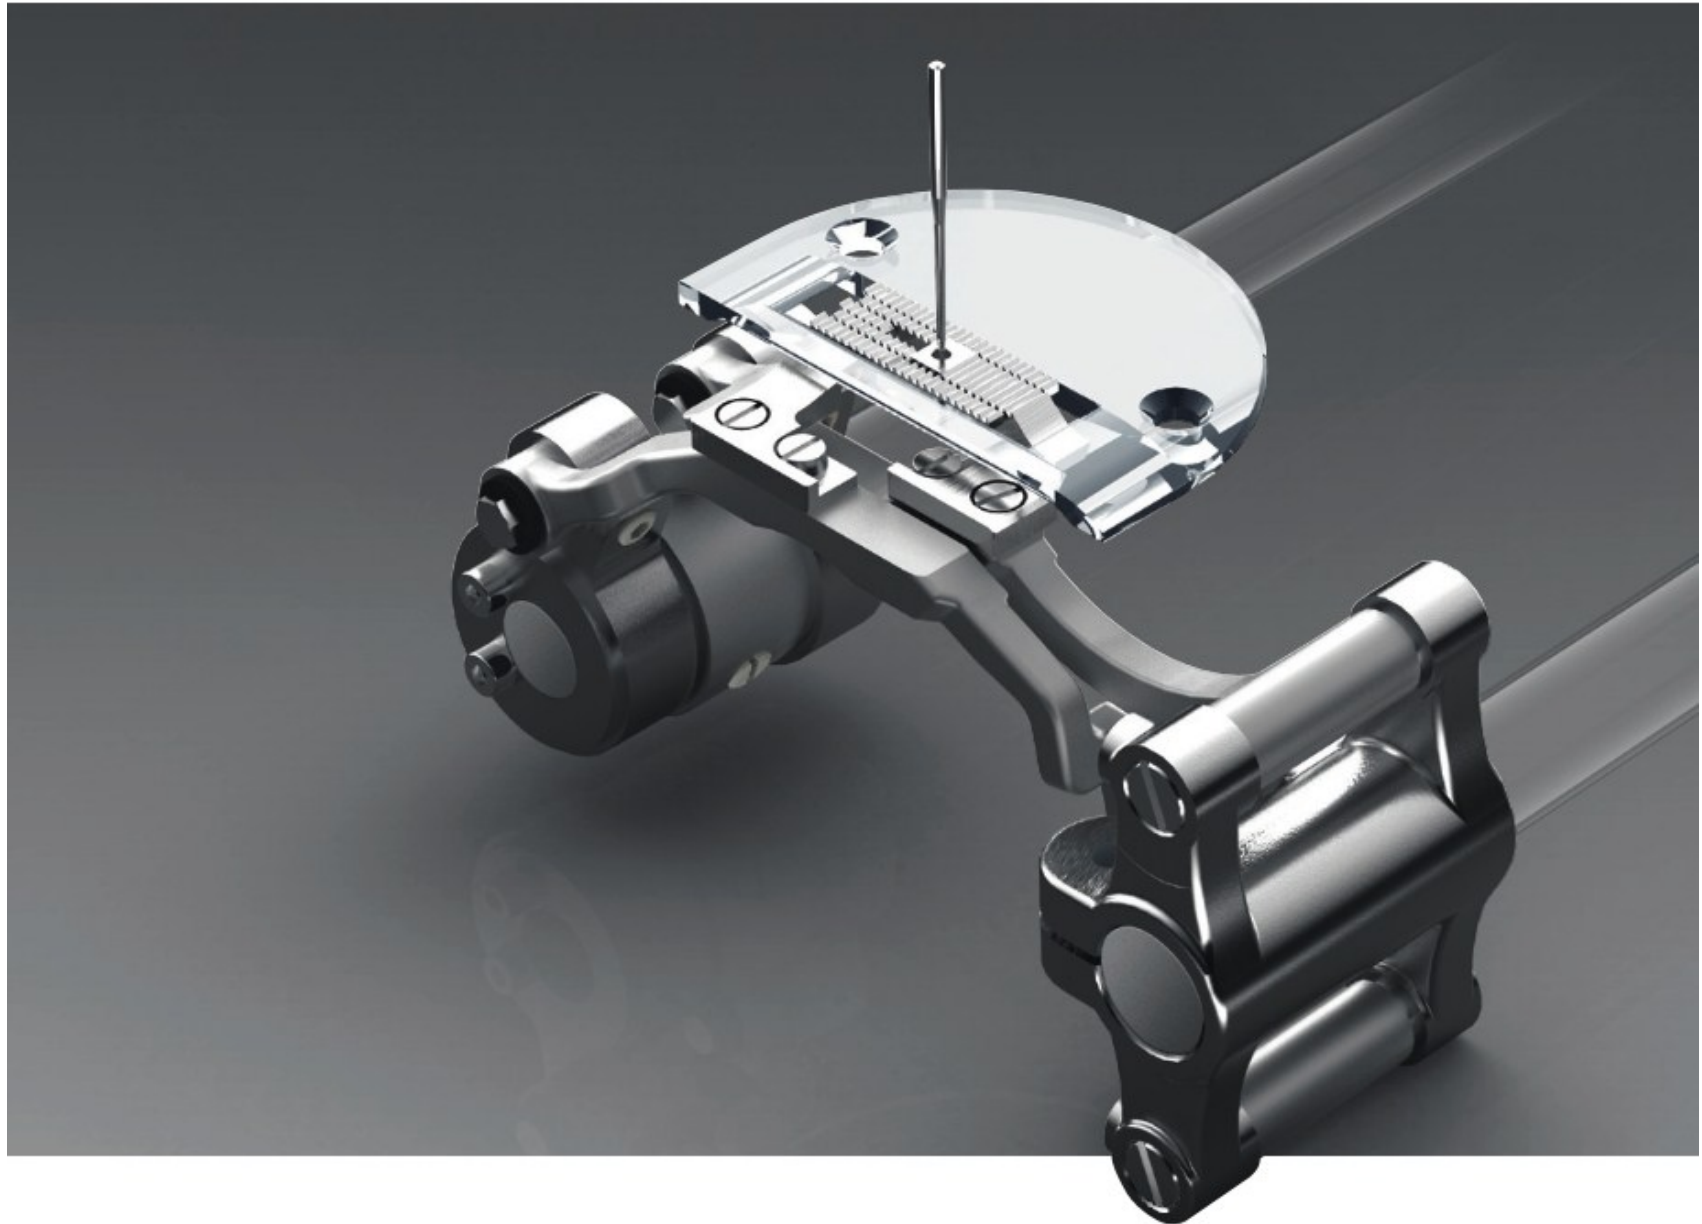

# TYPICAL X FEED

Evolution of seam quality

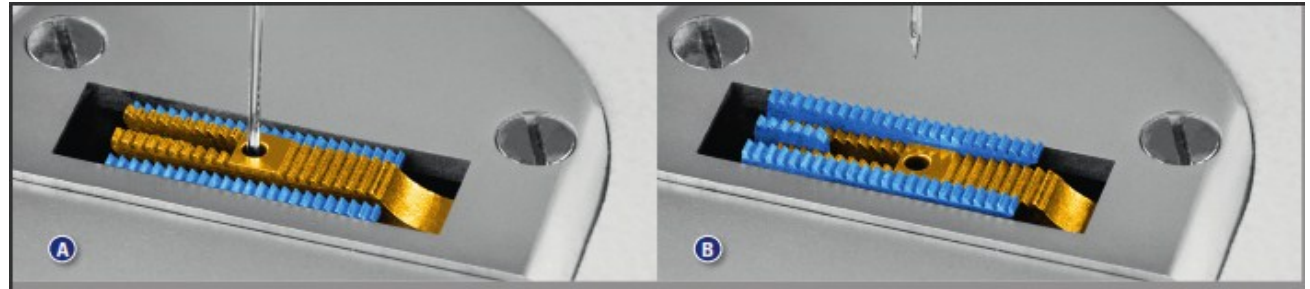

## Explained

The X feed is an innovative unique new feeding system. The benefits of this new system means that the work can be continuously fed, not stopping to allow the stitch to be formed. This makes the work easy for the operator to handle, also much longer stitches can be set for fine materials. When working on velvet or slippery materials on ordinary machines the top ply can end up much longer than the lower ply, with the X feed this is prevented meaning that you get a much more even looking finish to your work.

## Technical explanation

the X feed is a combination of needle feed, and drop feed. Drop feed is what is found on the conventional plain sewing machines, the material feeds when the needle is out of the work, the work stops feeding while the stitch is formed. Needle feed work is fed when the needle is in the work, this can help prevent the two plies from slipping.

X feed combines the two, feeding starts with the needle in the work as in needle feed (See A above), once the needle feed is complete the drop feed takes over (See B above) this helps close stitch in the material.

The result of all this also means that the machine can work with a much lighter tension with less strain on the thread.

Much longer stitches on fine material, up to 8mm.

Much easier to work on Heavy materials such as Jean with thick cross seams.



## Direct Drive Servo Motor

**Ho Hsing:** servo motor, control box, synchroniser, backed up by Australian service agents.

**AC servo motor:** Low power consumption with 600 watts output, smooth, and very quiet, top speed adjustable by operator.

**Synchroniser:** Needle stops down when pedal released, to turn work. Needle stops up when “Heel Back” to remove work.

“Heel Back” completely and thread is trimmed.

**Safety:** When machine is tipped back machine will not operate.

## Extended Arm

Ample working area to the right of the needle.

Full range of extra feet available, your range of existing feet will fit this machine.



**Full Featured Control Panel.**

**All The Setting You Will  
Ever Need, and More.**



**Sealed Oil Sump, No Oil  
Stains.**

**Check, and Refill Without  
Tilting Machine Back.**



## Warranty

12 Months on site warranty, parts, and labour.

With delivery, and setup (Melbourne Metropolitan Area)

All other areas 12 months return to point of purchase, with a \$100.00 discount towards freight.

Model	Stitch	Max Stitch Length	Bobbin	Feeding	RPM	Foot Lift	Work Area	Bed Dimensions	Needle	Made in
GC06730M3	Lock Stitch	8 mm	Standard	X Feed	5000	13mm	300 X 136 mm	52 X 18 cm	16X231 DBX1	China

# CAMSEW

**Importers of Typical, and CAMSEW industrial sewing machines.**

Phone: Ron. 0419 884 920

Email Ron: [camsew@outlook.com](mailto:camsew@outlook.com)

Web: [camsew.com.au](http://camsew.com.au)

Ringwood Melbourne Vic. (Please phone first to avoid a wasted trip)



# TYPICAL