



TW3-441

EXTRA HEAVY-DUTY COMPOUND FEED CYLINDER ARM LOCKSTITCH SEWING MACHINE

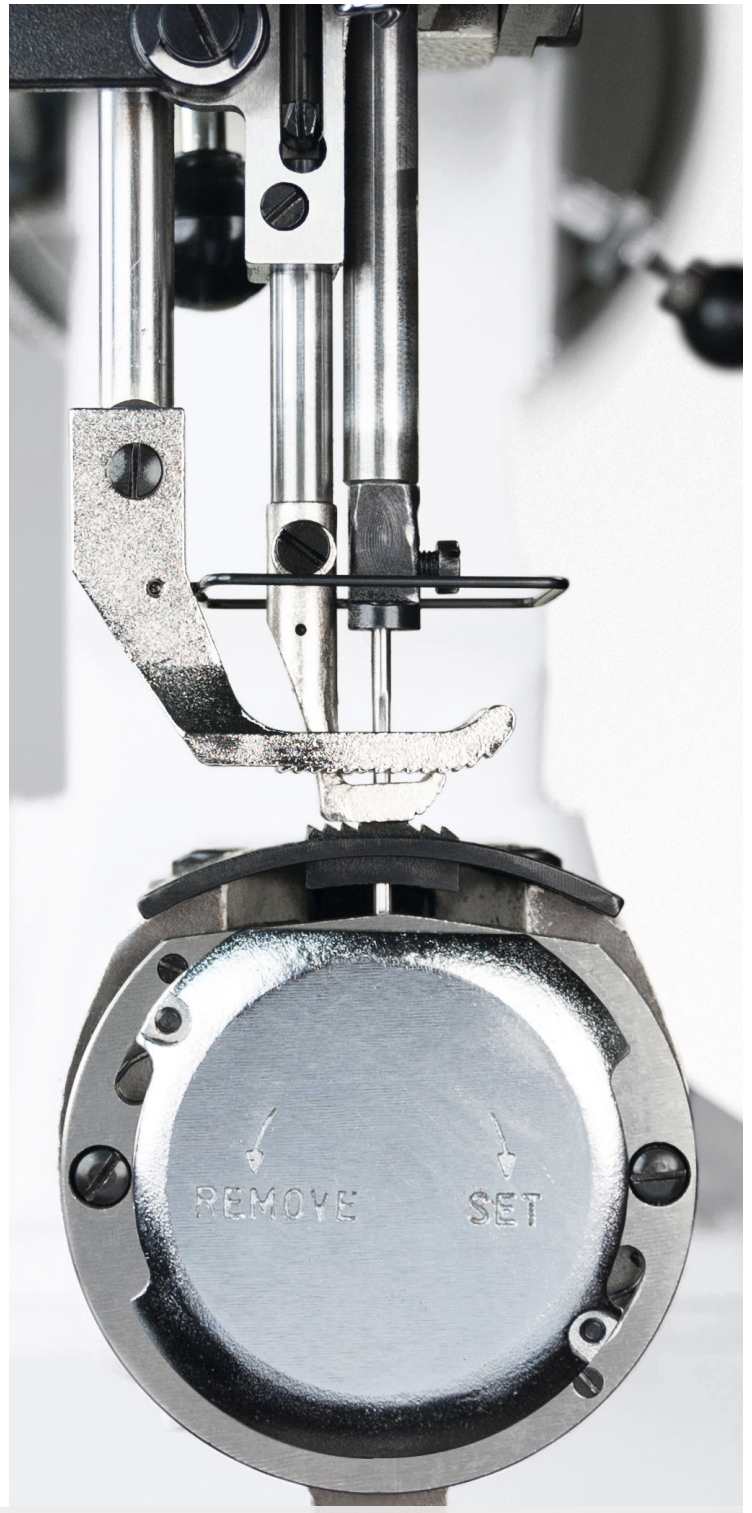

TYPICAL

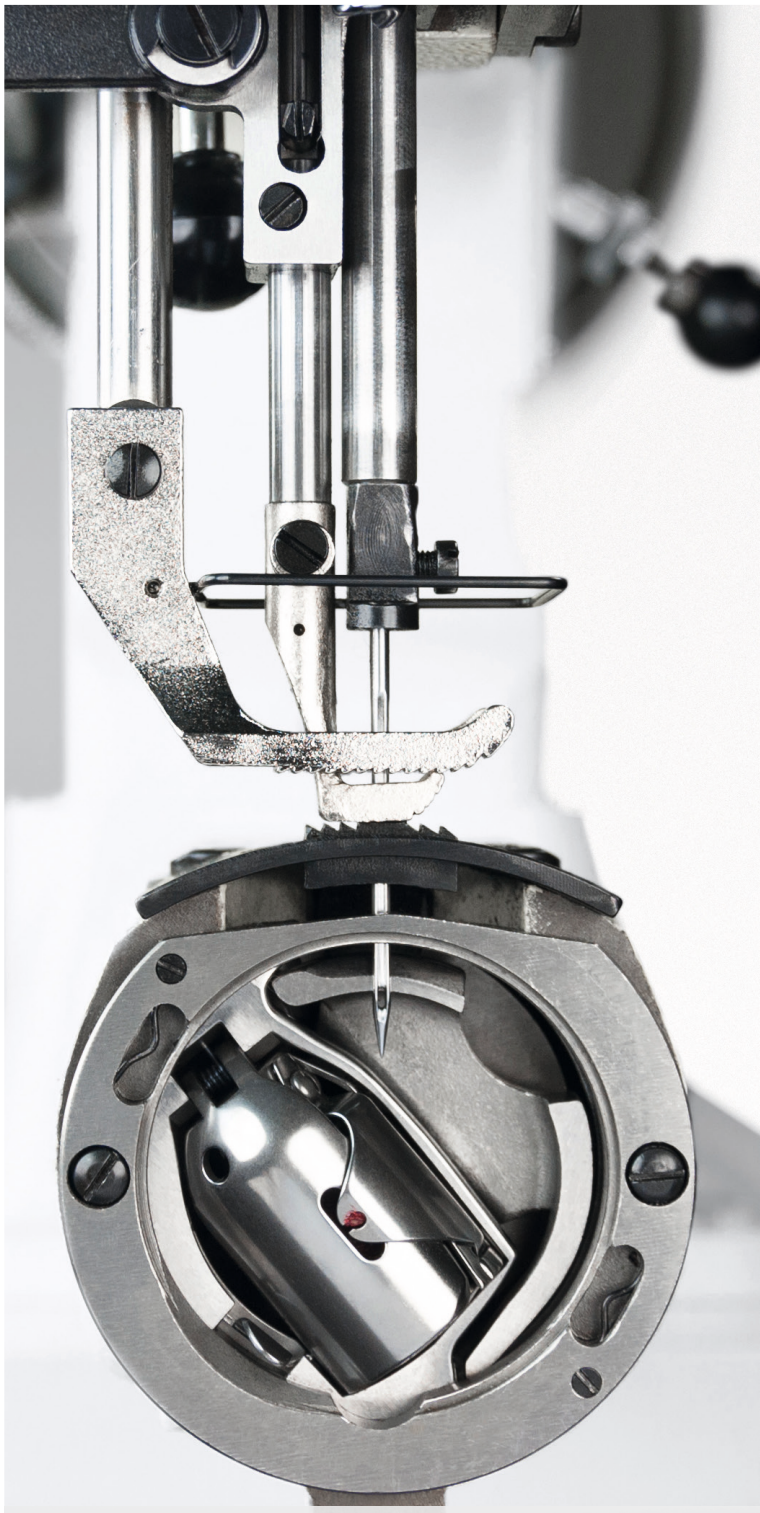

Barrel hook for extra heavy-duty applications. Thread sizes up to 8/3.


Features & Benefits

- Extra heavy-duty sewing machine
- Compound feed
- With barrel hook
- 5.5–8.5 mm top feed lift allows easy sewing even at cross-seams
- 25 mm clearance under the lifted sewing feet for easy loading and unloading
- Max. 11 mm stitch length adjustable – forwards and backwards
- Integrated bobbin winder
- Cylinder arm diameter 80 mm

Application

Upholstery industry, leather industry, technical textiles, etc.

TW3-441LD Clearance under the arm: 975×167 mm

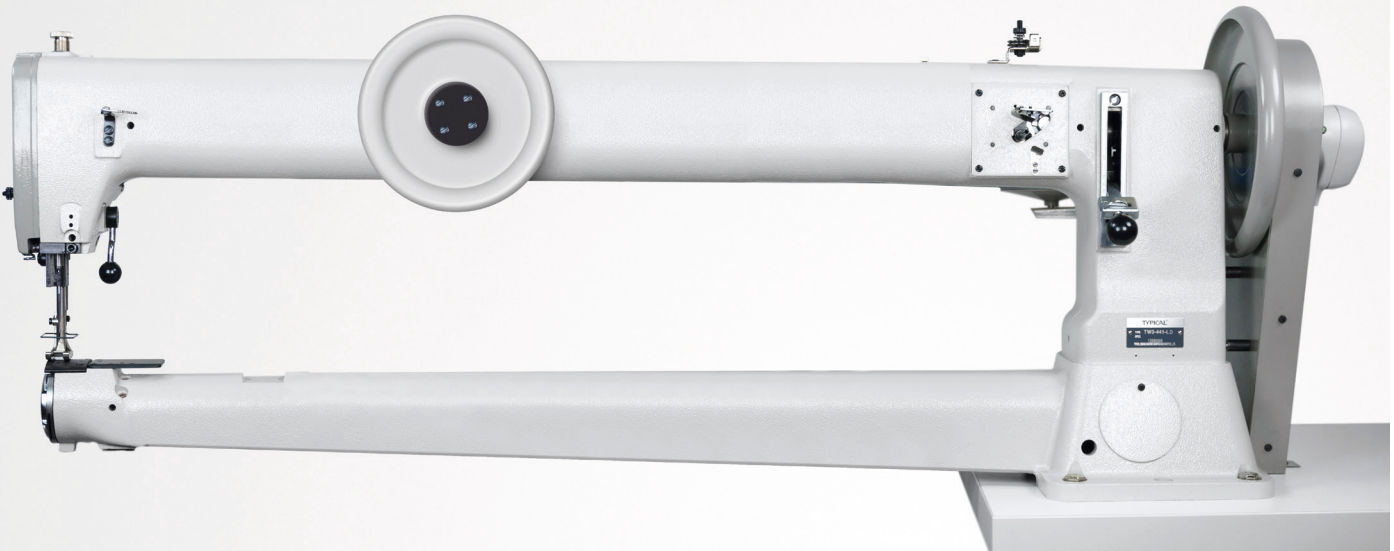

TYPICAL

TW3-441

Technical Data

- Stitch type 301 Lockstitch
- Max. sewing speed 800 spm
- Max. stitch length 11.0 mm
- Max. top feed stroke 8.5 mm
- Max. fabric clearance 25 mm
- Needle system DY×3
- Needle size Nm 180-250
- Balance wheel 155 mm eff. Dia.
- Recommended motor power minimum 0.75 kW


Clearance under the arm

- **TW3-441** 405×167 mm
- **TW3-441-S** 230×167 mm
- **TW3-441-L** 975×167 mm

Carton dimensions and gross weights for sewing head:

- **TW3-441** 89×44×59 cm 69 kg
- **TW3-441-L** 137×39×68 cm 130 kg

Specifications can differ depending on model.

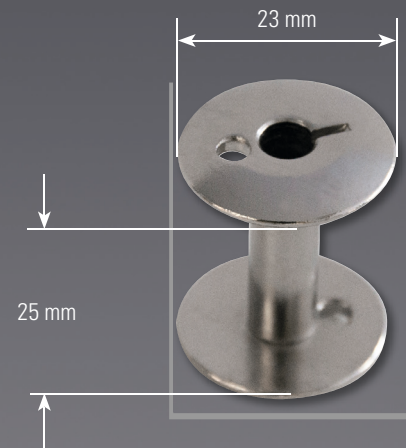

TW3-	441									13/25		
	441-S	•	800	•	11	DY×3 180-250	56	XL	Ø 81	13/25	8/3	M/H
	441-L									13/20		

TYPICAL Australia
Ringwood Vic 3134

camsew@outlook.com

Ronnie: 0419 884 920

